

Wiring Details (open ended)

Grey single core + screen(shield)

Audio:

Red core---Phase + (Hot)

Screen/Shield---Phase - (cold)


Single core red and black wires

Halo ring illumination:

Red wire---+12V dc

Black wire--0V

Current draw for halo = 30mA

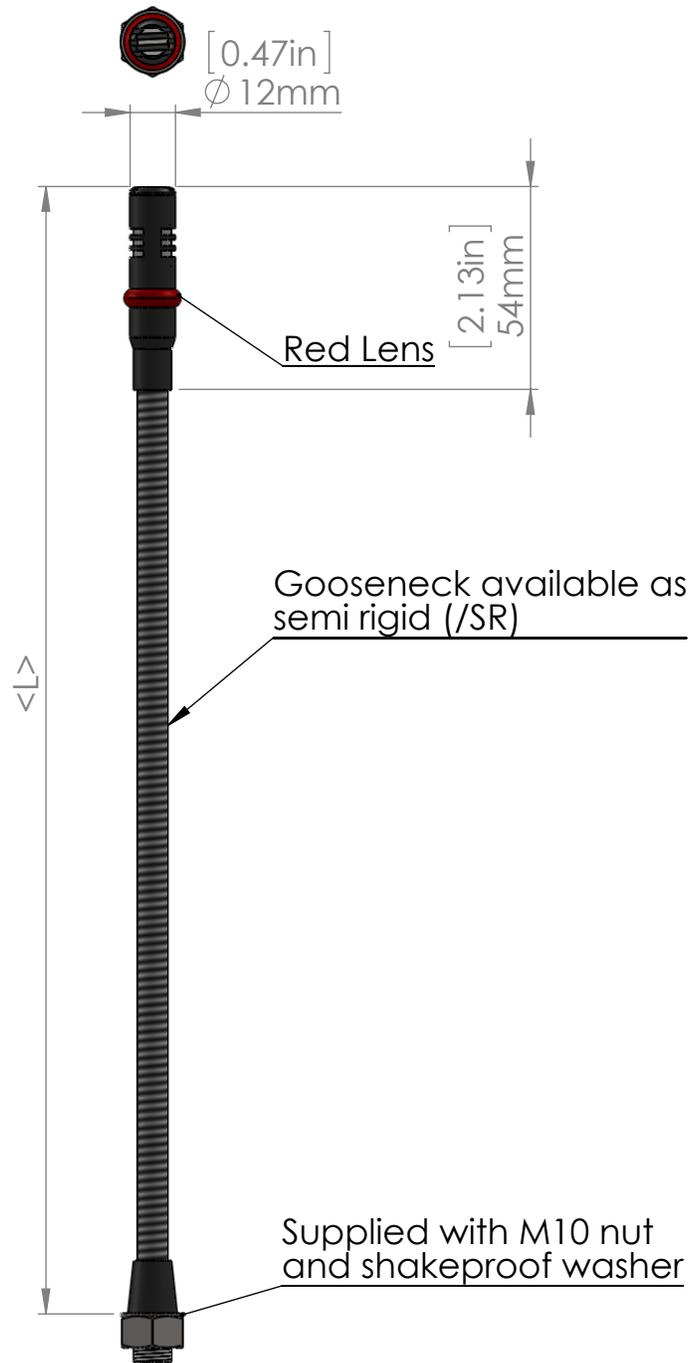

Model Number	<L>
C 31/Halo	100mm/3.9"
C 32/Halo	200mm/7.87"
C 33/Halo	300mm/11.8"
C 33/SR/Halo	300mm/11.8"
C 34/Halo	400mm/15.75"
C 34/SR/Halo	400mm/15.75"
C 35/Halo	500mm/19.69"
C 35/SR/Halo	500mm/19.69"
C 36/Halo	600mm/23.6"
C 36/SR/Halo	600mm/23.6"

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CLOCKAUDIO LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CLOCKAUDIO LTD IS PROHIBITED.	CLIENT APPROVAL			NAME	DATE	
	NAME		DRAWN	C.BUDGEN	03/07/12	
	COMPANY		MATERIAL	Brass		
	DATE		FINISH	Satin black		
	SIGNATURE		NOTES:			
COMMENTS:						C 3 Halo series
		SIZE	DWG. NO.	936	REV.	
		DO NOT SCALE DRAWING		SCALE:1:5	WEIGHT:	SHEET 1 OF 1