


DesignPRO TENSIONED PROJECTION SCREENS
electric screens with side tensioning system

PROJECTION

Legenda

- Code
- Ratio
- Screen size (AxB)
- Viewing size / inches (A'xB'/O")
- Viewing size (A'xB')
- Total screen size (WxH)
- Total size closed
- Min-max total size
- Screen case size
- Counterweight size
- Top extra drop
- Max extra top drop
- Lumens
- Max load
- Distance
- Run
- Fixing
- Arm
- Tilt
- Joints
- Pieces
- Cable management
- Volume
- Projector case
- Packing
- Net weight
- Gross weight

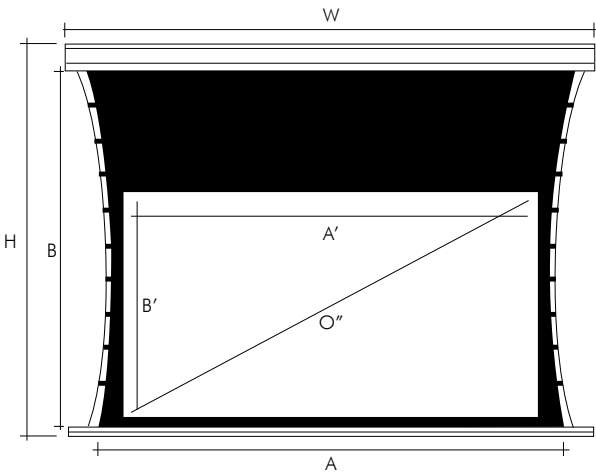

Above and on the left, details of the tensioning system and the screen case.
Below, automation kit: from left, optional head set (outside / inside), manual cable switch RJ11, projector trigger, remote radio control, RS485 cable control for home automation (domotics)



SOFT MATT WHITE		HiC MATT GREY									
662984		-	DesignPRO TENSIONED 100"	203x152/100"	255x215,5x10,5	255x11x10,5	243x4,5x1,5	44	20x16x270	18	21
663884		-	DesignPRO TENSIONED 120"	244x183/120"	296x249,5x10,5	296x11x10,5	284x4,5x1,5	44	20x16x300	20	23
667684		-	DesignPRO TENSIONED 150"	305x229/150"	357x246,5x10,5	357x11x10,5	345x4,5x1,5	44	20x16x332	23	28
PROJECTION SCREEN "DesignPro TENSIONED" HDTV 16:9 FORMAT											
662384		662354	DesignPRO TENSIONED HD84"	186x105/84"	238x188,5x10,5	238x11x10,5	226x4,5x1,5	64	20x16x253	16	19,3
663184		663154	DesignPRO TENSIONED HD92"	203x115/92"	255x198,5x10,5	255x11x10,5	243x4,5x1,5	64	20x16x269	18	20,6
663484		663454	DesignPRO TENSIONED HD100"	221x125/100"	273x208,5x10,5	273x11x10,5	261x4,5x1,5	64	20x16x288	20	22
663584		663554	DesignPRO TENSIONED HD106"	234x132/106"	286x215,5x10,5	286x11x10,5	274x4,5x1,5	64	20x16x299	21	22,9
663984		663954	DesignPRO TENSIONED HD120"	265x149/120"	317x232,5x10,5	317x11x10,5	305x4,5x1,5	64	20x16x332	23	25
667384		667354	DesignPRO TENSIONED HD135"	298x168/135"	350x251,5x10,5	350x11x10,5	338x4,5x1,5	64	20x16x366	25	27,5
ACCESSORIES											
660015		AUTOMATION KIT: head set, manual cable switch RJ11, projector trigger, remote radio control, RS485 cable control for home automation (domotics)								2,4	3,4

Size, in cm, weights expressed in kilograms, diagonal expressed in inches (")

Legenda

	Code
	Ratio
	Screen size (AxB)
	Viewing size / inches (A'xB'/'O")
	Viewing size (A'xB')
	Total screen size (WxH)
	Total size closed
	Min-max total size
	Screen case size
	Counterweight size
	Top extra drop
	Max extra top drop
	Lumens
	Max load
	Distance
	Run
	Fixing
	Arm
	Tilt
	Joints
	Pieces
	Cable management
	Volume
	Projector case
	Packing
	Net weight
	Gross weight

DesignPRO TENSIONED PROJECTION SCREENS

electric screens with side tensioning system

PROJECTION

Electric projection screen Design Pro Tensioned: elegant, silent, they fit perfectly to any type of environment, suitable both for domestic application as well as business ones. The side tensioning system consists of elastic cords that, passing through the eyelets, along the sides of the canvas, create a lateral curvature of the surface that, despite the presence of the eyelets, preserves the fabric from the risk of folds in the winding phase.

Technical features

- **Screens** realised with the following projection fabric: SOFT MATT WHITE and HIGH CONTRAST SOFT GREY (see technical specifications on pages 1-2-3)
- **Available** in video format 4:3 and HDTV format 16:9, with **outer black borders of 5 cm** and an **extra black drop** variable depending on the format chosen: the black edging increases the definition of the image projected on the screen
- **Screen lowering** from the **rear side of the box**
- **Side tensioning system** by strong and high quality elastic cords that pass through the eyelets along the sides of the canvas, starting from the ends of the bottom, creating a side arm that, despite the presence of the eyelets, preserves the fabric from the risk of folds, in the winding phase.
- **Extruded aluminium case, epoxy powder coated**, in **white** RAL 9010 colour, with ribs on the back side suitable for **hooking brackets**
- **Internal silver anodised aluminium tube** which hosts the electrical motor mounted on special rubber silent blocks
- **Single phase electric motor control**, IMQ, CE, **5-year warranty** from date of purchase, power supply 200V - 50Hz, 0.5 A absorption, degree of protection IP 44, 17 rpm, on the standard version the motor is mounted on the **right hand side**
- **Screen up and down electric inverter**, mounted on the power cord, standard supplied
- **Screen up and down limit switches** factory adjusted, possibility of different settings if necessary. The screen can also be stopped at intermediate heights acting on the electric inverter switch.
- **Screen case end caps of shock proof plastic** grey colour RAL 7035
- **Suspension brackets**, standard supplied, free positioning along the length of the box, made of steel, **epoxy powder coated in white** RAL 9010, suitable for wall or ceiling installation using appropriate screw anchors
- **Counterweight** with nice triangular drop shape design in **white colour**
- **Single rugged package**, double-cardboard type volcano
- **CE certified product, full warranty 12 months** as indicated on the operating and maintenance instructions
- **Optional accessories**: Automation Kit - head set, manual cable switch RJ11, projector trigger, remote radio control, RS485 cable control for home automation (domotics)

