

65" Wi-Fi Interactive Flat Panel

50 simultaneous touch points LED ULTRA HD

Integrated touch | Infrared technology | Integrated Microphone
Ambient light sensor | 15Wx2+20Wx2 Integrated speakers
Bytello Share license included | USB Type-C Full-Link 100W


HX6510

IFP 65" X SERIES WI-FI + WALL MOUNT

Google EDLA  **Android 13** 

65" 75" 86"

3 Year Warranty




Zero Gap Technology allows sharper images with better contrast and reduced glare.

Automatic brightness adjustment via ambient light sensor.



Infrared technology touch screen; usable even with gloves or any other solid object.

Anti-glare tempered glass with Mohs 7 4mm thickness.



Integrated 15Wx2 and 20Wx2 stereo speakers. Total power 30W + 40W




4x HDMI IN, 1x USB Type-C Full-Link 100W, 1x USB Type-C Full-Link 15W, 4x USB 3.0, 1x USB 2.0 OTG, 2x TOUCH OUT, 1x Display Port, 1x RS232, 2x LAN (RJ45 - Autoswitching)



CPU Octa Core A76x4+A55x4
8GB RAM, 128GB ROM
OPS Standard slot

SI07B Wi-Fi and Bluetooth module included




Software Touch Display+
Bytello Share
Perpetual license

Code HX6510		
DISPLAY	Lighting	Direct type LED
	Quality	Grade A
	Display area	142,8 × 80,3 cm
	Diagonal	65"
	Aspect ratio	16:9
	Resolution	UltraHD 4K
	Color depth	1.07 billion (10 bits)
	Brightness	560 cd/m² - 600 cd/m²
	Contrast	6.000:1
	Viewing angle	178°
	Refresh rate	60Hz
	Response time	≤1ms
	Sensors	Ambient light
TOUCH	Touch technology	Infrared matrix
	Driver	HID
	Simultaneous touch points	Up to 50 (Windows, Android and Mac OS)
	Input tools	Fingers (even with gloves) or any other passive object
	Object size	≤1.6 mm
	Response time	≤1.3 ms
	Accuracy	±0.5 mm (touch area greater than 90%)
TECH DATA	Input resolution	32768(W)×32768(D)
	Surface	Anti-reflective tempered glass 4mm Mohs level 7
	External dimensions	1488×908×86mm
	Net weight	38,67 Kg
	VESA	600×400 mm

INTERFACE	Input	4x HDMI IN (2x front), 1x USB Type-C Full-Link 100W (front), 1x USB Type-C Full-Link 15W (rear), 4x USB 3.0 (2x front), 1x USB 2.0 OTG, 2x TOUCH OUT, 1x Display Port, 1x RS232, 2x LAN (RJ45 - Autoswitching)
	Output	1x HDMI OUT, 1x USB Type-C OUT, 1x Audio OUT, 1x SPDIF
	Connectivity	Ethernet LAN, Wi-Fi, Bluetooth, HotSpot
	Microphone	Built-in Microphone Array x8 (Pickup distance 10 m)
	Speaker power	2×15W+2×20W
	OPS slot	Compatible with OPS Standard 80 Pin
ANDROID OS	System version	Android 13
	Compatible applications	GSuite, Google Apps, Microsoft Office, Microsoft Teams, Cisco Webex, Zoom, Google Chrome, Mozilla Firefox, Skype
	App installation	All apps compatible with the Android version of system (function can be deactivated)
	CPU	Octa Core A76×4+A55×4
	GPU	Mali-G610 MP4
	RAM	8 GB
	SSD	128 GB
ENERGY	Maximum consumption	415W
	Standby consumption	≤0.5W
	Lifetime	≥60.000 Hours
	Operating time	24/7
ACCESSORIES	Content of the package	1x EU / UK Power Cord (3m), 1x HDMI (3m), 1x USB (5m), User Manual, 2x Passive Pens 1x Remote Control (batteries included), 1x SI07B (Wi-Fi Module), 1x wall mounting
	Included software	Note (Android), Note ^{PLUS} (Windows) Capture (Windows), BytelloClass (Android)
Certifications		Warranty
EnergyStar**, ROhs, CE, SGS***, EDLA		3 years on center
Admitted languages		Catalan, Czech, Danish, German, Estonian, English, Spanish, French, Croatian, Italian, Hungarian, Dutch, Norwegian, Polish, Portuguese, Romanian, Turkish, Swedish, Greek, Russian, Arabic, Chinese, Japanese, Lithuanian.

Environmental Conditions				
Operation temperature	Operation humidity	Storage temperature	Storage humidity	Altitude
0°C~40°C	10%~90%RH	-20°C~ 60°C	10%~90%RH	less than 5000 m

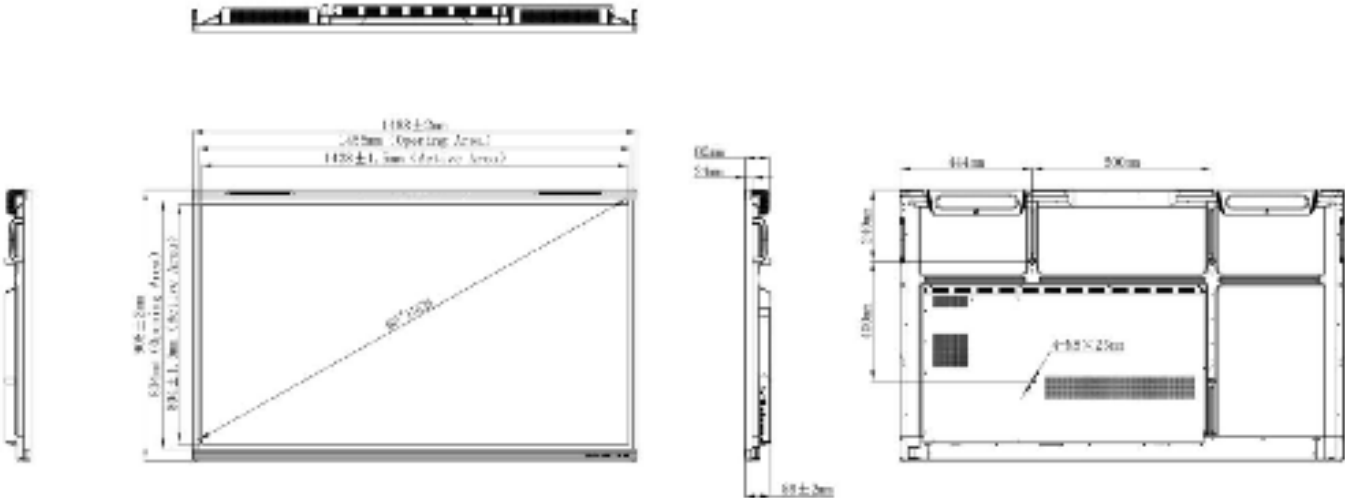

**Compliant with the European directive 2009/125/CE, known as ErP "Energy related Products" equivalent of American Energy Star
***Exclusive material treatment - Prevents the proliferation of common germs and bacteria



www.HELGI-europe.com

HELGI Europe

education@helgi-europe.com

business@helgi-europe.com

#24042025HX6510_EN

Dealer