

75" Wi-Fi Interactive Flat Panel

50 simultaneous touch points LED ULTRA HD

Integrated touch | Infrared technology | Integrated Microphone Ambient light sensor | 15Wx2+20Wx2 Integrated speakers Bytello Share license included | USB Type-C Full-Link 100W

HX7510

IFP 75" X SERIES WI-FI + WALL MOUNT















Zero Gap Technology allows sharper images with better contrast and reduced glare.

Automatic brightness adjustment via ambient light sensor.



Infrared technology touch screen; usable even with gloves or any other solid object.

Anti-glare tempered glass with Mohs 7 4mm thickness.



Integrated 15Wx2 and 20Wx2 stereo speakers. Total power 30W + 40W



4x HDMI IN, 1x USB Type-C Full-Link 100W, 1x USB Type-C Full-Link 15W, 4x USB 3.0, 1x USB 2.0 OTG, 2x TOUCH OUT, 1x Display Port, 1x RS232, 2x LAN (RJ45 -Autoswitching)



CPU Octa Core A76×4+A55×4 8GB RAM. 128GB ROM **OPS Standard slot**

SI07B Wi-Fi and Bluetooth module included




Software Touch Display+ Bytello Share Perpetual license

	Code HX7510					
	Lighting	Direct type LED				
	Quality	Grade A				
	Display area	165,0 × 92,8mm				
	Diagonal	75"				
	Aspect ratio	16:9				
	Resolution	UltraHD 4K				
DISPLAY	Color depth	1.07 billion (10 bits)				
DISF	Brightness	560 cd/m² - 600 cd/m²				
	Contrast	6.000:1				
	Viewing angle	178°				
	Refresh rate	60Hz				
	Response time	≤lms				
	Sensors	Ambient light				
	Touch technology	Infrared matrix				
	Driver	HID				
	Simultaneous touch points	Up to 50 (Windows, Android and Mac OS)				
ТОИСН	Input tools	Fingers (even with gloves) or any other passive obje				
TOL	Object size	≤1.6 mm				
	Response time	≤1.3 ms				
	Accuracy	±0.5 mm (touch area greater than 90%)				
	Input resolution	32768(W)×32768(D)				
тесн рата	Surface	Anti-reflective tempered glass 4mm Mohs level 7				
	External dimensions	1709,4×1031×85,7mm				
	Net weight	51,46Kg				
	VESA	800×400 mm				

INTERFACE	Input	(front), 1x U (2x front), 1	(2x front), 1x USB Type-C Full-Link 100W SB Type-C Full-Link 15W (rear), 4x USB 3.0 v USB 2.0 OTG, 2x TOUCH OUT, 1x Display 32, 2x LAN (RJ45 - Autoswitching)		
	Output	1x HDMI OUT, 1x USB Type-C OUT, 1x Audio OUT, 1x SPDIF			
	Connectivity	Ethernet LAN, Wi-Fi, Bluetooth, HotSpot			
	Microphone	Built-in Microphone Array x8 (Pickup distance 10 m)			
	Speaker power	2×15W+2×20W			
	OPS slot	Compatible with OPS Standard 80 Pin			
	System version	Android 13			
ANDROID OS	Compatible applications	GSuite, Google Apps, Microsoft Office, Microsoft Teams, Cisco Webex, Zoom, Google Chrome, Mozilla Firefox, Skype			
	App installation	All apps compatible with the Android version of system (function can be deactivated)			
Ä	CPU	Octa Core A76×4+A55×4			
٩	GPU	Mali-G610 MP4			
	RAM	8 GB			
	SSD	128 GB			
	Maximum consumption	530W			
ENERGY	Standby consumption	≤0.5W			
R	Ligfetime	≥60.000 Hours			
	Operating time	24/7			
ORIES	Content of the package	1x EU / UK Power Cord (3m), 1x HDMI (3m), 1x USB (5m), User Manual, 2x Passive Pens 1x Remote Control (batteries included), 1x SI07B (Wi-Fi Module), 1x wall mounting			
ACCESSORIES	Included software	Note (Android), Note ^{plus} (Windows) Capture (Windows), BytelloClass (Android)			
Cer	tifications		Warranty		
EnergyStar**, ROhs, CE, SGS***, EDLA			3 years on center		
Admitted languages			Catalan, Czech, Danish, German, Estonian, English, Spanish, French, Croatian, Italian, Hungarian, Dutch, Norwegian, Polish, Portuguese, Romanian, Turkish, Swedish, Greek, Russian, Arabic, Chinese, Japanese, Lithuanian.		

Environmental Conditions	ronmental Conditions					
Operation temperature	Operation humidity	Storage temperature	Storage humidity	Altitude		
0°C~40°C	10%~90%RH	-20°C~ 60°C	10%~90%RH	less than 5000 m		

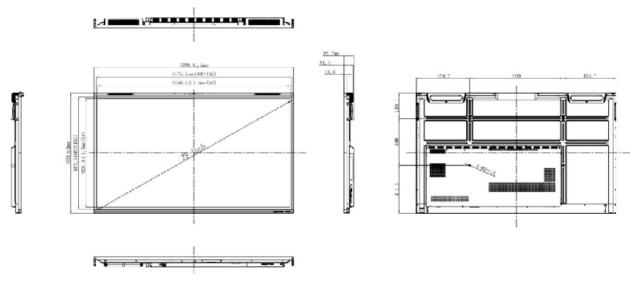

^{**}Compliant with the European directive 2009/125/CE, known as ErP "Energy related Products" equivalent of American Energy Star ***Exclusive material treatment - Prevents the proliferation of common germs and bacteria







www.HELGI-europe.com

HELGI Europe education@helgi-europe.com business@helgi-europe.com

#24042025HX7510_IT

Dealer			