

L18 ₽15



P15 Under L18 Rigging System

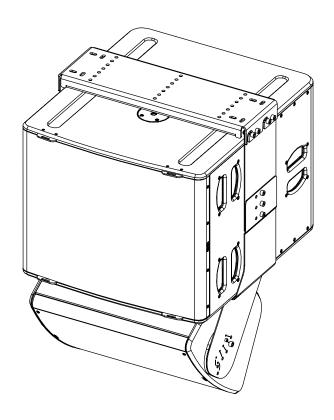

Contents:

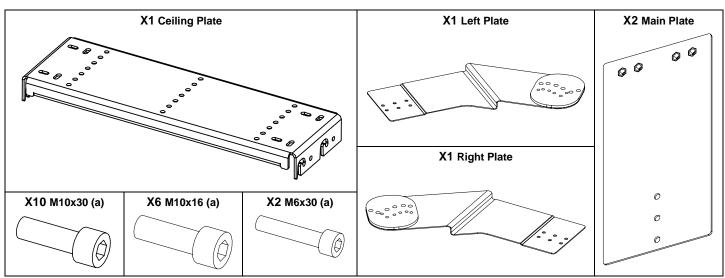

(a): The type of the screws may differ from the representation


Weight: 21 kg / 46.2 lb





- Read this document before using.
- Keep this document.
- Observe all warnings and cautions.



Dimensions:







For fixation, you have the choice between M8 and M10

WARNINGS

Ensure that the mounting location and fasteners can support at least 4 times the weight of all the installed cabinets, auxiliary equipment and cables.

Use only the provided screws (thread lock coated) and accessories.

Implementation of a L18

•		
Prepare the Main plates by screwing the M10x30 screws on the holes (see picture below), do not tighten completely and leave at least 6mm.	Place the assembly below the ceiling plate.	Tighten the screws. Secure with the 4 provided M10x30 screws.
Assemble the Plates on each side of L18 using the M10x16 screws.		






- Keep this document.

- Observe all warnings and cautions.



Implementation of a P15

Place P15 between the plates, position at the chosen angle, fasten with M10x30 screws and secure with M6x30 screws.

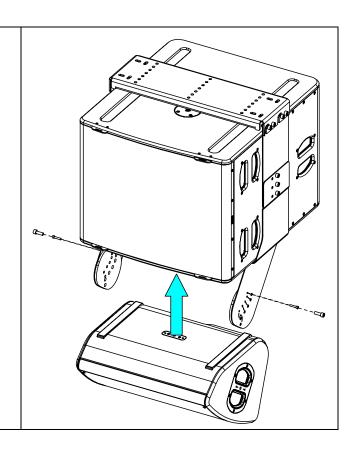

PNI-P15TOL18 frame tilt

P15	Holes 1	Holes 2	Holes 3	Holes 4	Holes 5	Holes 6	Holes 7
0°	3,0°	-0,5°	-4,0°	-7,5°	-11,0°	-14,0°	-17,5°
-15°	3,0°	-0,5°	-4,0°	-7,5°	-11,0°	-14,0°	-17,5°
-25°	4,0°	0,5°	-3,0°	-6,5°	-10,0°	-13,5°	-16,5°
-35°	5,0°	1,5°	-2,5°	-6,0°	-9,0°	-12,5°	-16,0°
-45°	5,5°	2,0°	-1,5°	-5,0°	-8,5°	-12,0°	-15,5°
-55°	5,5°	2,0°	-1,5°	-5,0°	-8,5°	-12,0°	-15,5°

Note 1: Holes 1 are those toward F.O.H.


Note 2: All angles measurements have been done without cables weight.

Note 3 : Angles are in relation to Horizontal position (0°)





Standard inclinations:

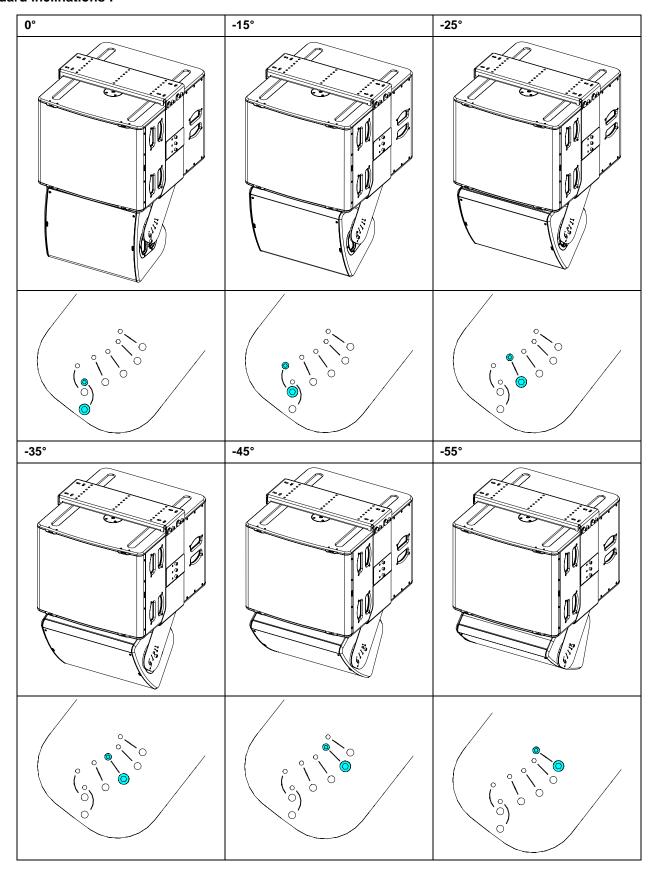

- NEXO cannot accept responsibility for accidents caused by any factor other than defects in this product itself.
- Please check the web site <u>nexo-sa.com</u> for the latest update.



- Read this document before using.Keep this document.Observe all warnings and cautions.

