

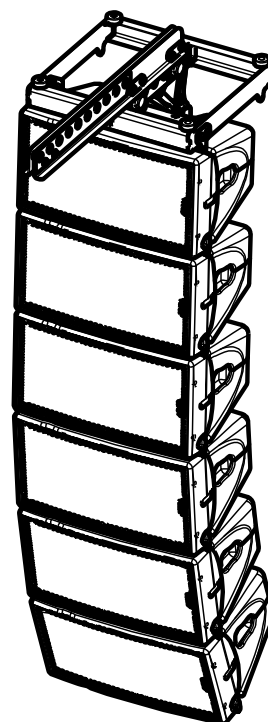


## Bumper for GEOM10

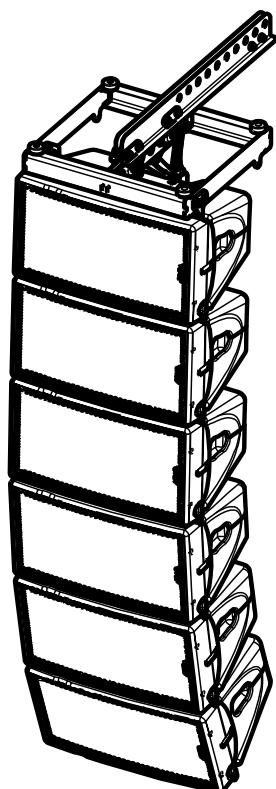

### Contents:

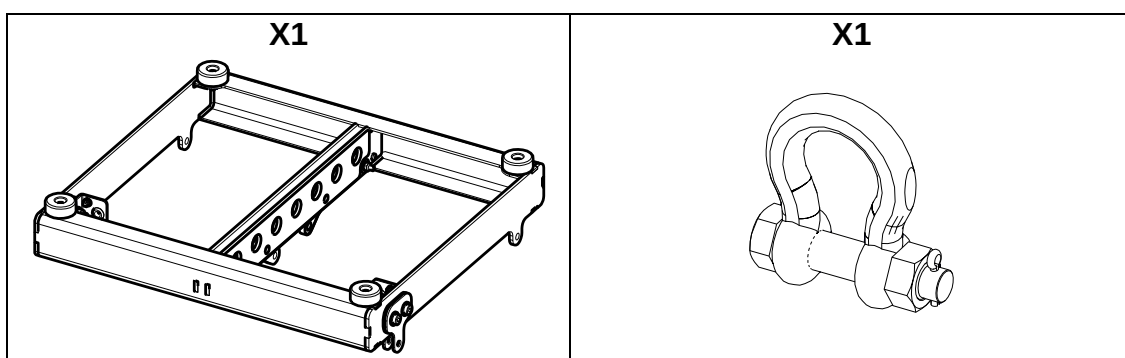

**Weight: 8 kg / 18 lb (without shackle)**



www.nexo-sa.com




ZA du pre de la Dame Jeanne

60128 PLAILLY-France

- Read this document before using.
- Keep this document.
- Observe all warnings and cautions.



## Dimensions:

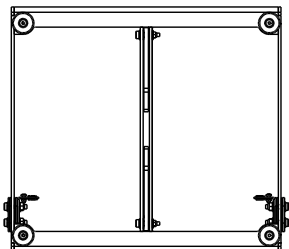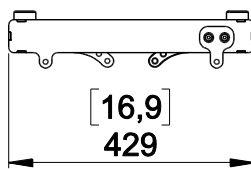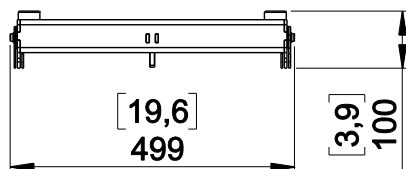

**Use: Max 12x GEOM10 flown or 3x GEOM10 stack**

**HF on the right (stack)**

|                                                                                                                             |                                                                                                              |                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Remove the two quick release pins <i>BL0820AR</i> , and the quick release pin of <i>LBUMPM10</i> link bar <i>BL0825AU</i> . | Take out <i>GEOM10</i> link bar. Place <i>GEOM10</i> and lock with the 2 quick release pin <i>BL0820AV</i> . | Adjust the angle with the <i>LBUMPM10</i> link bar. Lock with the quick release pin <i>BL0825AU</i> . |
|                                                                                                                             |                                                                                                              |                                                                                                       |

**HF on the left (stack)**

|                                                                                        |                                                                                                                                                    |                                                                                                       |
|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Remove the quick release pin of <i>LBUMPM10</i> link bar <i>BL0825AU</i> to unlock it. | Take out <i>GEOM10</i> link bar. Pull the 2 <i>AutoRig</i> in automatic lock position and place <i>GEOM10</i> . Check that it is properly engaged. | Adjust the angle with the <i>LBUMPM10</i> link bar. Lock with the quick release pin <i>BL0825AU</i> . |
|                                                                                        |                                                                                                                                                    |                                                                                                       |

**WARNING:** Use shackle model: Alloy Bolt Type Shackles 3.25 Tons

Use **NEXO** Simulation Software for mechanical prediction

- NEXO cannot accept responsibility for accidents caused by any factor other than defects in this product itself.
- Please check the web site [nexo-sa.com](http://nexo-sa.com) for the latest update.

**NEXO**

[www.nexo-sa.com](http://www.nexo-sa.com)

ZA du pre de la Dame Jeanne

60128 PLAILLY-France

- Read this document before using.
- Keep this document.
- Observe all warnings and cautions.

